



**All-in-one CCTV tester**


- ◆ 4.3 inch IPS touch screen, 960\*540 resolution
- ◆ 8MP TVI, 8MP CVI, 8MP AHD & SDI/8MP EX-SDI test \*
- ◆ H.265/H.264, 4K video display via mainstream
- ◆ Dahua, Hikvision, Axis etc ONVIF camera test
- ◆ Built in WIFI, create WIFI hotspot
- ◆ HDMI input & output, support 1080p
- ◆ DC12V 2A, DC48V PoE power output
- ◆ Rapid ONVIF, auto view video and create testing report
- ◆ RJ45 cable TDR test, cable quality test
- ◆ TesterPlay: Tester, mobile phone, PC display at the same time



**Application**

The 4.3 inch touch screen IP camera tester is designed for maintenance and installation of IP analog, HD coaxial cameras as well as other security equipment. The 960x540 resolution enables it to display network HD cameras and analog cameras in high resolution. The unit supports many ONVIF PTZ and analog PTZ control. Additionally, it has other functions like TDR cable test, Digital multi-meter, UTP cable test and cable scan etc. CCTV installers often need to carry a variety of testing tools to complete their work. If they take the all-in-one camera tester, making working conditions safer and increasing productivity.

- ☞ CCTV system installation and maintenance
- ☞ Network cabling project installation and maintenance
- ☞ Dome camera, IP TVI CVI AHD SDI 4K H.265 camera testing
- ☞ Video transmission channel testing
- ☞ PTZ controller

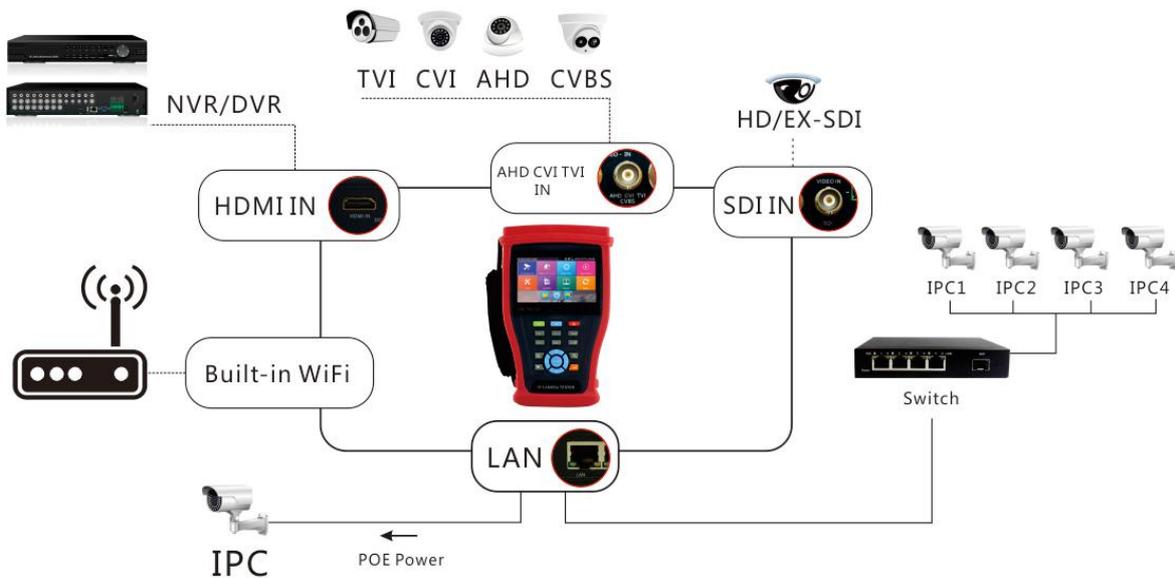

## Features

### Camera test:

- ⌘ 4.3 inch IPS touch screen, 960\*540 resolutions
- ⌘ H.265 & H.264 IP, 4K video display via mainstream
- ⌘ 8MP TVI test, 3840 x 2160P 12.5/15 fps, 4xzoom, video record & playback, coaxial PTZ control & call OSD menu \*
- ⌘ 8MP AHD test, 3840x2160P 15 FPS, 4xzoom, video record & playback, coaxial PTZ & call OSD menu \*
- ⌘ 8MP CVI test, 3840 x 2160P 12.5/15 fps, 4xzoom, video record & playback, coaxial PTZ & call OSD menu \*
- ⌘ 8MP EX-SDI test, 3840 x 2160P 25/30 FPS, 4xzoom, video record & playback, coaxial PTZ & call OSD menu \*
- ⌘ HD-SDI test, 1920 x 1080P 25/30/50/60 FPS, 4xzoom, video record & playback, coaxial PTZ & call OSD menu \*
- ⌘ 3G-SDI test, 1920 x 1080P 50/60 FPS, 4xzoom, video record & playback, coaxial PTZ & call OSD menu \*
- ⌘ Rapid ONVIF, Auto log in and display image, create testing report
- ⌘ AXIS, Hikvision camera test, enter ONVIF app, input username and password to test
- ⌘ CVBS camera test and PTZ control
- ⌘ IPC TEST (Non-ONVIF test), HIK test tool (Hikvision camera), DH test tool (Dahua camera)
- ⌘ Video level meter, peak video signal level, SYNC signal level, Color bar chroma level measurement\*
- ⌘ DC12V/2A power output, camera can be powered from DC 12V
- ⌘ 48V PoE power output power
- ⌘ Rapid video, just by one key to detect and auto display all network cameras
- ⌘ Built in Wi-Fi, display image from the wireless camera, create WIFI hotspot
- ⌘ CVBS loop test, the tester send and receive color bar generator signal, to check BNC cable
- ⌘ Enhanced Color bar generator, PAL/NTSC multi-system color bar video generator

### Cable test:

- ⌘ Improvement cable tester, UTP cable, telephone cable etc order and connectivity test, can save testing report, if special number, need customized
- ⌘ RJ45 cable TDR test, test cable pair status, length, attenuation, reflectivity, impedance, skew etc
- ⌘ Cable tracer, search BNC cable, network cable and telephone cable from the mess cables \*

### Other functions:

- ⌘ Network tool: Ping, IP scan, Port Flash, DHCP server, Trace Route
- ⌘ POE & power information, DC12V & PoE power and voltage output /input measurement
- ⌘ TesterPlay: Tester, android version mobile phone and PC display at the same time
- ⌘ Shortcut button, drop-down menu, can select PoE power, IP setting, CVBS, LAN info, HDMI IN etc
- ⌘ HDM input, 720x480p / 720x576p / 1280x720p / 1920x1080p / 1024x768p / 1280x1024p / 1280x900p / 1440x900p display, record and snapshot \*
- ⌘ Traffic monitoring, display network port or WIFI connection real-time upload and download speeds and other network parameters
- ⌘ Self-update software, you can install apps with android version
- ⌘ Media player, 4K video files and MKV/MP4 media files play
- ⌘ Quick office, quick office app (support excel, word, ppt format) doc. editable
- ⌘ 8GB SD card including
- ⌘ Display its genuine resolution of the IP camera images
- ⌘ Audio in, support record and save the audio/LED lamp, calculators, music players and other application tools
- ⌘ 7.4 V / 5000mAh Lithium Ion Polymer Battery, after 5~6 hours charging, working time lasts 10 hours

## Specifications

LCD	Item series	IPC-4300 Plus series	
	Display	New 4.3 inch IPS touch screen , 960*540 resolution	
Video Mode	CVBS	1 channel BNC input & 1 channel BNC looped output, NTSC/PAL (Auto adapt)	
		Analog video level meter, peak video signal level, SYNC signal level, Color bar chroma level measurement*	
		PTZ control,RS485 control, Baud 600-115200bps,compatible with more than 30 protocols such as PELCO-D/P, Samsung, Panasonic etc	
		CVBS loop test	the tester send and receive color bar generator signal , check BNC cable
	IP camera test 4k/H.265/H.264	IP Discovery/Quick ONVIF/IPC test /RTSP play /Client APK	
		Rapid Video	Auto view the video, create testing report
		Hik test tool	activate hikvision camera , modify the user name, password and IP parameters
		Dahua test tool	Dahua camera test, modify the user name, password and IP parameters
	IP& CVBS test	IP& CVBS test at the same time ,converter test from analog to digital with dual test window	
	Coaxial HD test *	8MP TVI camera test,3840 x 2160P 12.5/15 FPS, UTC control/ call OSD menu *	
		8MP CVI camera test,3840 x 2160P 12.5/15 FPS,UTC control/ call OSD menu *	
		8MP AHD test, 3840x2160P 15 FPS, UTC control/ call OSD menu *	
8MP EX-SDI, HD-SDI, 3G-SDI, UTC control & call OSD menu *			
HDMI input *	1 channel HDMI input, support 1080P *		
Zoom Image	4x zoom, to enlarge image, Screen snapshot, record ,save ,view and record and play back		
Analog Video out	Color bar generator	Output one channel PAL/NTSC color bar video signal for testing monitor or video cable	
Power output	PoE power output	48V PoE power output, max power 25.5W	
	DC12V power	DC12V /2A power output	
Cable test	TDR cable test *	BNC cable, network cable, telephone cable, RVV cable and elevator cable, cat 5/6 cable's length and short circuit. measurement range 1.2KM *	
	Cable tracer *	search BNC cable, network cable and telephone cable from the mess cables *	
	UTP cable test	Test UTP cable connection status and display on the screen. Read the number on the screen	
	RJ45 cable TDR test	Test cable pair status, length, attenuation, reflectivity, impedance, skew etc. measurement range 180M.	
TesterPlay	screen projection: tester, mobile phone and PC display at the same time (For android version mobile phone)		
Network test	Trace route, Link monitor , DHCP server, port flashing , Ping test		
Wi-Fi	Built in WIFI,speeds150M,display wireless camera image		
Audio test	1 channel audio signal input, test whether sound normal, 1 channel audio signal, to connect headphone		
Data monitor	Captures and analyzes the command data from controlling device,also can send hexadecimal		
PoE test	Measurement POE switch or PSE power supply voltage and cable connection status		
Drop-down menu	You can select PoE power switch ,IP setting,CVBS, LAN info , HDMI IN functions etc in any interface		
External power supply	DC 12V 2A		
Battery	Built-in 7.4V Lithium polymer battery, 5000mAh		
Rechargeable	After charging 5~6 hours, normal working time 10 hours		
Operation setting	OSD menu, select your desired language: English, Chinese, Korean, Russian, Italian, French, Polish, Spanish, Japanese etc		
Auto off	1-30 (mins)		
Working Temperature	-10℃---+50℃		
Working Humidity	30%-90%		

Dimension/Weight	215mm x 127mm x 53mm / 0.82kg
<b>Below are customizable functions, , if add Digital multimeter and cable tracer function into tester NO MOQ .If add other below functions ,QTY MOQ is 50pcs (If add any functions into tester, you need pay addition cost),if you add one of "A/D/H/S" ,then cannot choose "T"</b>	
M	Digital Multimeter: DC and AC voltage measurement, Resistance measurement, Continuity test, Diode measurements, Capacitance measurement
O	Optical power meter, Wavelength: 1625,1550nm,1490nm,1310nm,1300nm,850nm, measurement range ,-70 ~ +10 dBm, for optical power testing and Fiber link loss relative measurement
V	Visual fault locator: 10mW visual fault locator with 650nm wavelength can emit red laser sources to test multi-mode and single mode fiber's bending and breakage, test range 10KM
T	TDR cable test: BNC cable, network cable, telephone cable, RVV cable and elevator cable, cat 5/6 cable's length and short circuit. measurement range 1.2KM
A	8MP AHD test, 3840x2160P 15 FPS, UTC control/ call OSD menu
H	8MP TVI camera test,3840 x 2160P 12.5/15 FPS, UTC control/ call OSD menu
D	8MP CVI camera test,3840 x 2160P 12.5/15 FPS,UTC control/ call OSD menu
S	8MP EX-SDI, HD-SDI, 3G-SDI, UTC control & call OSD menu
L	Video level meter :PEAK ,SYNC signal level, color burst chroma level measurement
C	Cable tracer :search BNC cable, network cable and telephone cable from the mess cable

**Note: "\*" sign mean functions are customizable**

The data above is only for reference and any change of them will not be informed in advance. For more detailed technical inquiries, please feel free to contact us.

### Packing kits

- 1). Tester
- 2). Network cable tester
- 3). Adaptor DC12V 2A/ 8GB SD card
- 4). Polymer lithium ion battery (7.4V DC 5000mAh)
- 5). Tool bag / DC Power cable/BNC cable/ RS485 cable/ Audio cable/ Safety cord
- 6). SC, ST Connector (Only for optical power meter models)
- 7). Multi-meter test leads one pair of red and black (only for the Multi-meter models)
- 8). TDR alligator clamp (only for TDR models)
- 9). Manual